



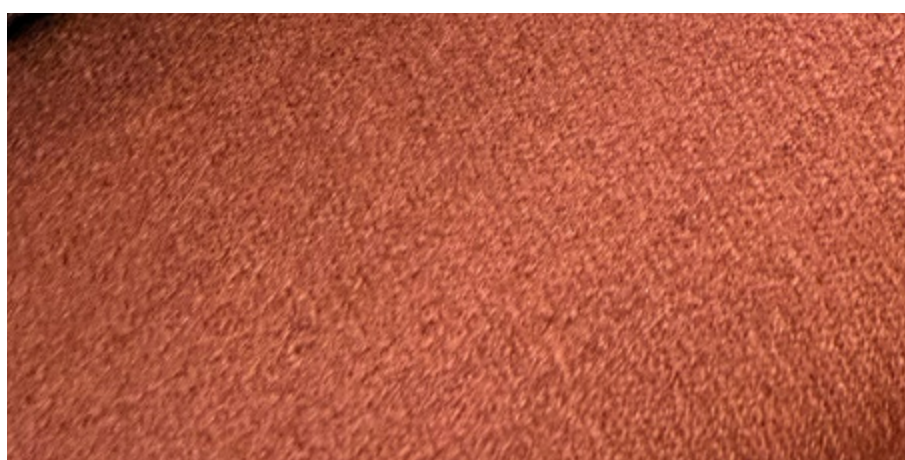

# FEEL NUBUK

An imitation of nubuck leather in a double-face construction. Dry to the

touch, unmistakable in look and feel – remarkably close to the original.

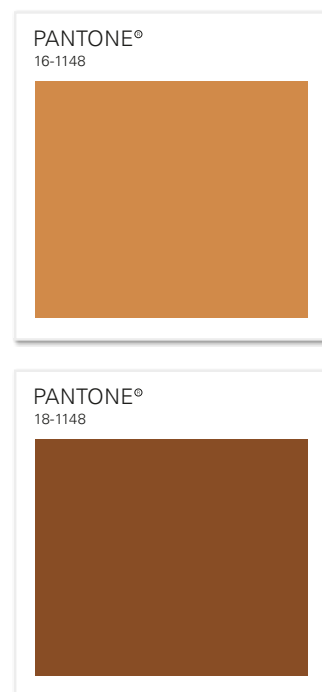

FEEL NUBUK | COLOR PALETTE 01



FEEL NUBUK | COLOR PALETTE 02





Article specification:

|               |                   |                         |                   |
|---------------|-------------------|-------------------------|-------------------|
| Roll length:  | ~30 m             | Width:                  | 142 cm +   - 2 cm |
| Usable width: | 142 cm +   - 2 cm | Weight m DIN EN 12127:  | 805 g +   - 5 %   |
| Thickness:    | 0.96 mm +   - 2 % | Weight m² DIN EN 12127: | 575 g +   - 5 %   |

Composition:

|                                                                                     |                       |                |
|-------------------------------------------------------------------------------------|-----------------------|----------------|
|  | Surface EU 1007 2011: | 100% Polyester |
|  | Base EU 1007 2011:    |                |

Product profile for upholstery fabrics in living areas | according to DIN EN 14465:2006

|                                                                                       |                                                                          |                           | category                |
|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------|---------------------------|-------------------------|
|    | Abrasion test (cycles)<br>EN ISO 12947-1,2                               | >15.000<br>(Loss of pile) | >45.000<br>(Martindale) |
|    | Pilling test EN ISO 12945-2 (2.000 T)                                    | 4-5                       | A                       |
|    | Tensile strength EN ISO 13934-1<br>warp:<br>weft:                        | 1000 N<br>650 N           | A<br>A                  |
|   | Tear growth resistance EN ISO 13937-3<br>warp:<br>weft:                  | 150 N<br>115 N            | A<br>A                  |
|  | Resistance seam slippage EN ISO 13936-2<br>warp:<br>weft:                | 2.0 mm<br>2.0 mm          | A<br>A                  |
|  | Fastness to rubbing dry EN ISO 105-X12<br>bright colors<br>dark colors   | 4-5<br>4                  | A<br>B                  |
|  | Fastness to rubbing wet EN ISO 105-X12<br>bright colors:<br>dark colors: | 4<br>4                    | A<br>A                  |
|  | Fastness to light EN ISO 105-B02-2<br>bright colors:<br>dark colors:     | 5<br>4-5                  | B<br>B                  |
|  | Permissible color tolerance<br>DIN EN 20105-A02                          | min. grade 4              | passed                  |

Typical product characteristics:

Light colors show staining and denim abrasion faster and more clearly than dark colors. In combination with dark or intense shades, color migration/color transfer may occur. Dark and intense colors tend to show color abrasion. Pilling is unavoidable and can also occur due to the adhesion of foreign fibers. Minor color and structural deviations between production batches are unavoidable and may occur. A certain degree of fading due to exposure to light or abrasion is inherent to the nature of the fabric. Every pile fabric will flatten with use, making changes in pile layers and seating marks unavoidable. Shimmering/ color shifts depending on light incidence are characteristic of pile fabric. Pile fabrics tend to be pressure-sensitive.

# CLEANING INSTRUCTIONS

Daily care and at-home cleaners can keep your fabric looking beautiful for years. In the case of a spill, stain, or general wear and tear, follow our tips on how to clean a fabric.



For cleaning you need distilled water and a ph neutral shampoo.




You need a white, clean and soft cotton cloth. Use this to remove the stain in circular motions and allow the area to dry.




Cleaning only with the vacuum cleaner nozzle.


Recommended care labeling:




washing




bleaching



drying



ironing



dry cleaning

Note on Washability

Tests were carried out on samples in accordance with EN ISO 105-C06. Washing was done in a washing machine, without detergent, followed by air drying.

According to the standard:

“From the first wash onwards, color changes of up to grade 2 (grey scale) and size changes of  $\pm 3\%$  in length and width (warp/weft) may occur. These values apply for up to five washing cycles.”

Additional washing cycles may further affect the appearance and dimensional stability of the upholstery fabric beyond these ranges.

Finishes (for example Easy-Clean finishes or similar treatments) can be affected by washing processes. The function of such finishes generally applies only to the unwashed condition.

General Note

Tests were carried out on different samples in new, unused, and unwashed condition. The results should therefore be understood as average guideline values and do not guarantee identical values during actual use.



Instructions for use and care:

Please take note of the instructions for use and care at [www.eurotex2000.com/Care](http://www.eurotex2000.com/Care) instructions. We assume no warranty for damage caused by improper use, cleaning, care, subsequent impregnation and pets.

Cleaning instruction:

Important information and useful tips for optimum cleaning and care of your upholstery fabric can be found at [www.2-clean.de](http://www.2-clean.de). Further cleaning will have to be done by professionals who specialize in how to clean with this description.

Proved by:

